



# PMF

AXIAL PISTON MOTOR



## YEOSHE

YEOSHE HYDRAULICS TECHNOLOGY CO.,LTD.



# AXIAL PISTON MOTOR

## Product name

The PMF Series is an axial piston motor which is used for traveling, swing and winching of industrial machinery and industrial vehicles.

## Product Description

PMF Series is a fixed displacement swash type piston motor which combines with weight reduction, down-size and high durability.

PMF Series is designed with a simple structure to keep the outstanding durability against rapid acceleration/deceleration, torque changes by frequent rotation/reverse rotation, and pressure variation.



## Specification

|   | MODEL           | DISPLACEMENT<br>(cc/rev) | PRESSURE (kgf/cm) |     | TORQUE (kgf·m) |      | SPEED<br>(rpm) | WEIGHT<br>(kg) |
|---|-----------------|--------------------------|-------------------|-----|----------------|------|----------------|----------------|
|   |                 |                          | RATED             | MAX | RATED          | MAX  |                |                |
| ○ | PMF-20-01       | 20                       | 210               | 250 | 6.6            | 8    | 3000           | 7.5            |
| ○ | PMF-25-01       | 25.7                     | 210               | 250 | 8.6            | 10.2 | 3000           | 7.5            |
| ○ | PMF-25-02/03    | 25.7                     | 210               | 250 | 8.6            | 10.2 | 3000           | 8              |
| ○ | PMF-25-05/06/07 | 25.7                     | 210               | 250 | 8.6            | 10.2 | 3000           | 8              |
| ※ | PMF-25-08/09    | 25.7                     | 210               | 250 | 8.6            | 10.2 | 3000           | 8              |
| ○ | PMF-36-01       | 36                       | 210               | 250 | 12             | 14.3 | 3000           | 10.4           |
| ○ | PMF-36-04       | 36                       | 210               | 250 | 12             | 14.3 | 2800           | 10.4           |
| ○ | PMF-39-01/02    | 39                       | 210               | 250 | 13             | 15.5 | 2500           | 10.4           |
| ※ | PMF-39-03       | 39                       | 210               | 250 | 13             | 15.5 | 2500           | 10.4           |
| ○ | PMF-43-01       | 43                       | 210               | 250 | 14.3           | 17.1 | 3000           | 10.4           |
| ○ | PMF-43-02/03/05 | 43.2                     | 210               | 250 | 14.3           | 17.1 | 2800           | 10.4           |
| ○ | PMF-47-01/11    | 47                       | 210               | 250 | 15.7           | 18.7 | 3000           | 10.4           |

"※" In Stock, Regular Item ; "○" Custom Orders Accepted

Our company's related products are subject to design changes without prior notice.



# AXIAL PISTON MOTOR

## Model description

PMF : axial piston motor

product code

Order model :

PMF - 25 - 03 - K  
 model Displacement series number axis type

cc/rev : 20  
 25.7  
 36  
 39  
 43  
 43.2  
 47

S : 13T Pressure Angle 20° M1.667 JIS  
 K : Please refer to the table below for displacement.



Street Sweeper



Boom Mower




# PMF-20-01


## Specification

| MODEL     | DISPLACEMENT<br>(cc/rev) | PRESSURE (kgf/cm) |     | TORQUE (kgf·m) |     | SPEED<br>(rpm) | WEIGHT<br>(kg) |
|-----------|--------------------------|-------------------|-----|----------------|-----|----------------|----------------|
|           |                          | RATED             | MAX | RATED          | MAX |                |                |
| PMF-20-01 | 20                       | 210               | 250 | 6.6            | 8   | 3000           | 7.5            |


## Performance Curve

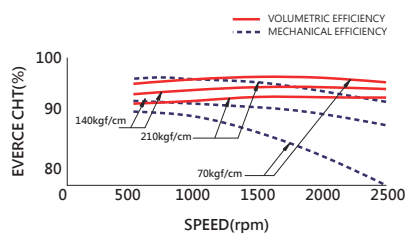


## Output Torque

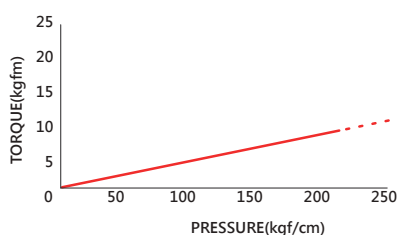

## Symbol



## Dimensions

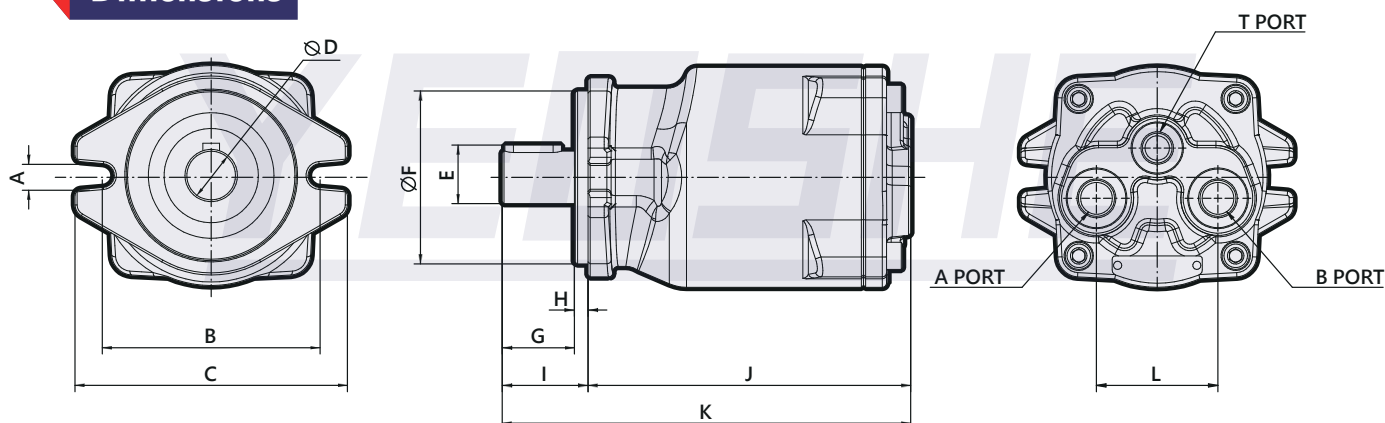

| MODEL       | A    | B   | C   | D   | E  | F     | G    | H   | I  | J     | K     | L  |
|-------------|------|-----|-----|-----|----|-------|------|-----|----|-------|-------|----|
| PMF-20-01-K | 11.2 | 106 | 130 | Ø24 | 27 | Ø82.5 | 34.5 | 6.5 | 41 | 153.5 | 194.5 | 58 |

## Port Size

| MODEL       | INLET/OUTLET PORT | CASE DRAIN PORT |
|-------------|-------------------|-----------------|
| PMF-20-01-K | PF 3/8            | PF 3/8          |

## Dimensions of Shaft

| MODEL       | NO. OF TEETH | PRESSURE | ANGLE | RULE     |
|-------------|--------------|----------|-------|----------|
| PMF-20-01-K | 7×7×27       |          |       | KEY TYPE |




# PMF-25-01


## Specification

| MODEL     | DISPLACEMENT<br>(cc/rev) | PRESSURE (kgf/cm) |     | TORQUE (kgf·m) |      | SPEED<br>(rpm) | WEIGHT<br>(kg) |
|-----------|--------------------------|-------------------|-----|----------------|------|----------------|----------------|
|           |                          | RATED             | MAX | RATED          | MAX  |                |                |
| PMF-25-01 | 25.7                     | 210               | 250 | 8.6            | 10.2 | 3000           | 7.5            |


## Performance Curve

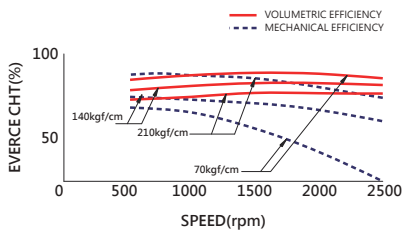


## Output Torque

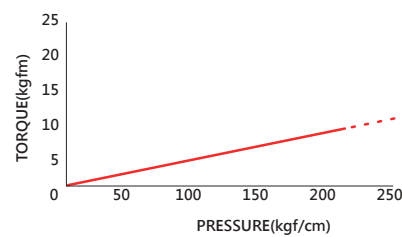

## Symbol



## Dimensions

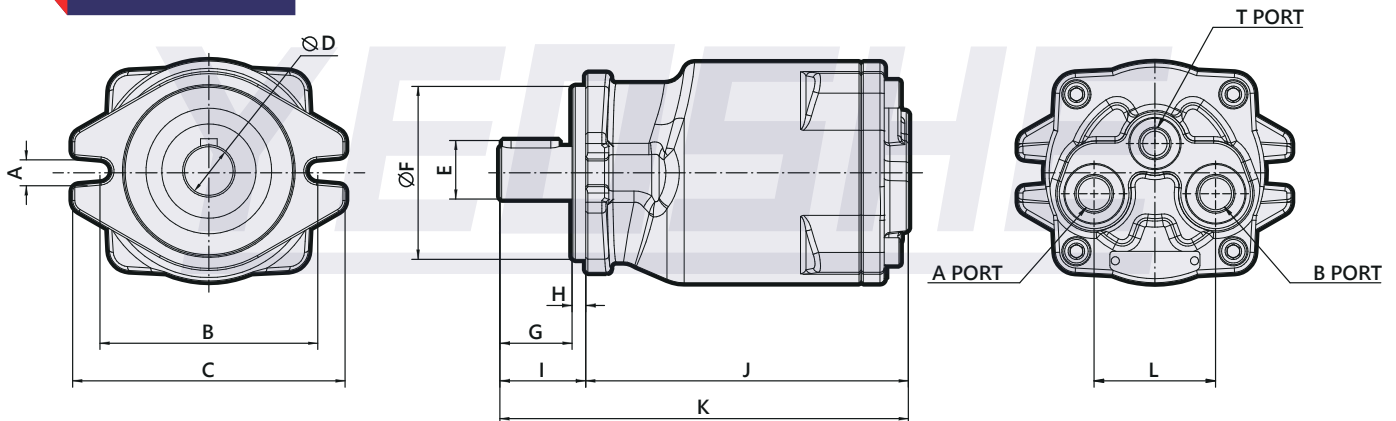

| MODEL         | A    | B   | C   | D       | E       | F     | G    | H   | I  | J     | K     | L  |
|---------------|------|-----|-----|---------|---------|-------|------|-----|----|-------|-------|----|
| PMF-25-01-K,D | 11.2 | 106 | 130 | Ø25     | Ø28     | Ø82.5 | 34.5 | 6.5 | 41 | 153.5 | 194.5 | 58 |
| PMF-25-01-S,F | 11.2 | 106 | 130 | Ø24.667 | Ø24.667 | Ø82.5 | 40.5 | 6.5 | 47 | 153.5 | 200.5 | 58 |

## Port Size

| MODEL         | INLET/OUTLET PORT | CASE DRAIN PORT |
|---------------|-------------------|-----------------|
| PMF-25-01-K,D | PF 3/8            | PF 3/8          |
| PMF-25-01-S,F | PF 3/8            | PF 3/8          |

## Dimensions of Shaft

| MODEL         | NO. OF TEETH | PRESSURE | ANGLE | RULE     |
|---------------|--------------|----------|-------|----------|
| PMF-25-01-K,D | 8×7×27       |          |       | KEY TYPE |
| PMF-25-01-S,F | 13           | 20°      | 1.667 | JIS      |




# PMF-25-02/03


## Specification

| MODEL        | DISPLACEMENT<br>(cc/rev) | PRESSURE (kgf/cm) |     | TORQUE (kgf·m) |      | SPEED<br>(rpm) | WEIGHT<br>(kg) |
|--------------|--------------------------|-------------------|-----|----------------|------|----------------|----------------|
|              |                          | RATED             | MAX | RATED          | MAX  |                |                |
| PMF-25-02/03 | 25.7                     | 210               | 250 | 8.6            | 10.2 | 3000           | 8              |


## Performance Curve

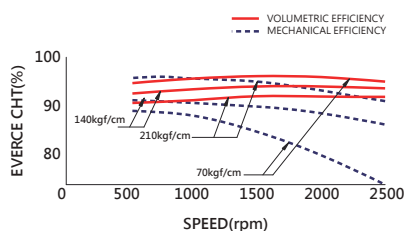


## Output Torque

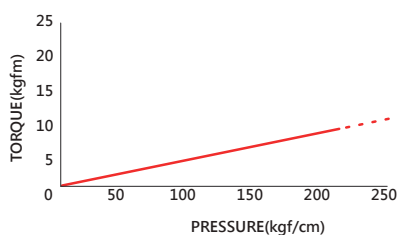

## Symbol



## Dimensions

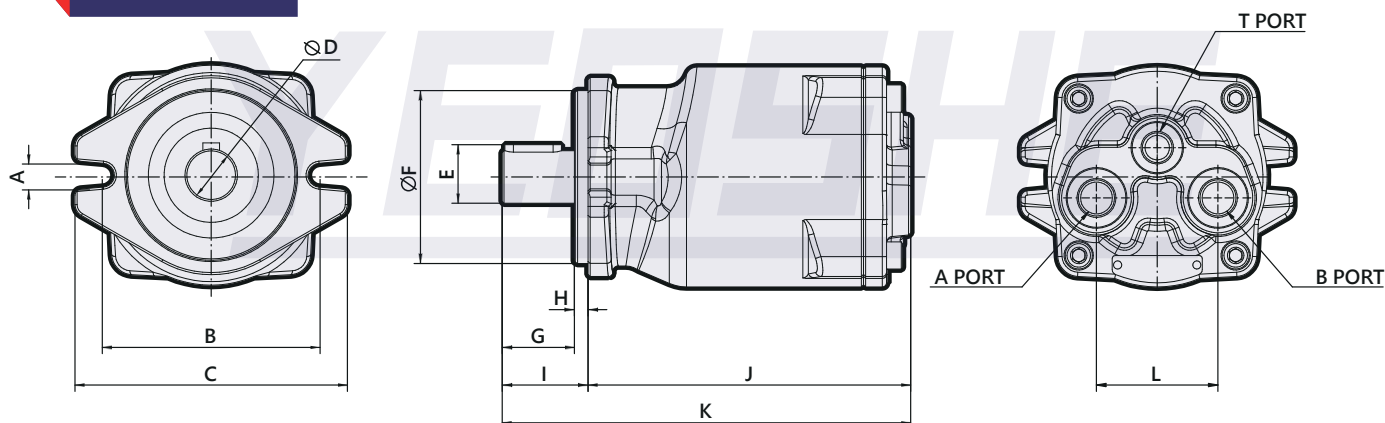

| MODEL       | A  | B   | C   | D       | E       | F               | G    | H   | I    | J     | K     | L  |
|-------------|----|-----|-----|---------|---------|-----------------|------|-----|------|-------|-------|----|
| PMF-25-02-K | 15 | 146 | 170 | Ø24     | 27      | Ø101.6~Ø101.549 | 31.9 | 9.1 | 41   | 153.5 | 194.5 | 58 |
| PMF-25-02-S | 15 | 146 | 170 | Ø24.667 | Ø24.667 | Ø101.6~Ø101.549 | 41   | 9.1 | 50.1 | 153.5 | 203.3 | 58 |
| PMF-25-03-K | 15 | 146 | 170 | Ø24     | 27      | Ø101.6~Ø101     | 32.1 | 9.1 | 41.2 | 153.5 | 194.7 | 58 |

## Port Size

| MODEL       | INLET/OUTLET PORT | CASE DRAIN PORT |
|-------------|-------------------|-----------------|
| PMF-25-02-K | PF 3/8            | PF 3/8          |
| PMF-25-02-S | PF 3/8            | PF 3/8          |
| PMF-25-03-K | PF 1/2            | PF 1/4          |

## Dimensions of Shaft

| MODEL       | NO. OF TEETH | PRESSURE | ANGLE | RULE     |
|-------------|--------------|----------|-------|----------|
| PMF-25-02-K | 7×7×27       |          |       | KEY TYPE |
| PMF-25-02-S | 13           | 20°      | 1.667 | JIS      |
| PMF-25-03-K | 7×7×27       |          |       | KEY TYPE |




# PMF-25-05/06/07


## Specification

| MODEL           | DISPLACEMENT<br>(cc/rev) | PRESSURE (kgf/cm) |     | TORQUE (kgf·m) |      | SPEED<br>(rpm) | WEIGHT<br>(kg) |
|-----------------|--------------------------|-------------------|-----|----------------|------|----------------|----------------|
|                 |                          | RATED             | MAX | RATED          | MAX  |                |                |
| PMF-25-05/06/07 | 25.7                     | 210               | 250 | 8.6            | 10.2 | 3000           | 8              |


## Performance Curve

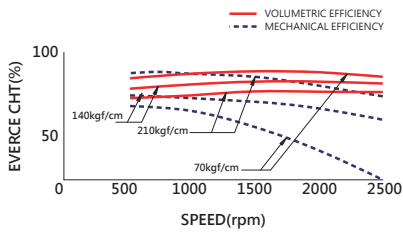


## Output Torque

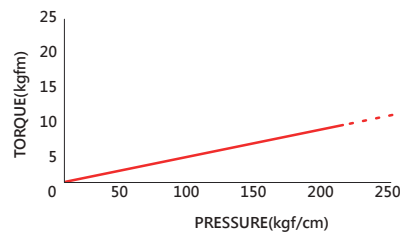

## Symbol



## Dimensions

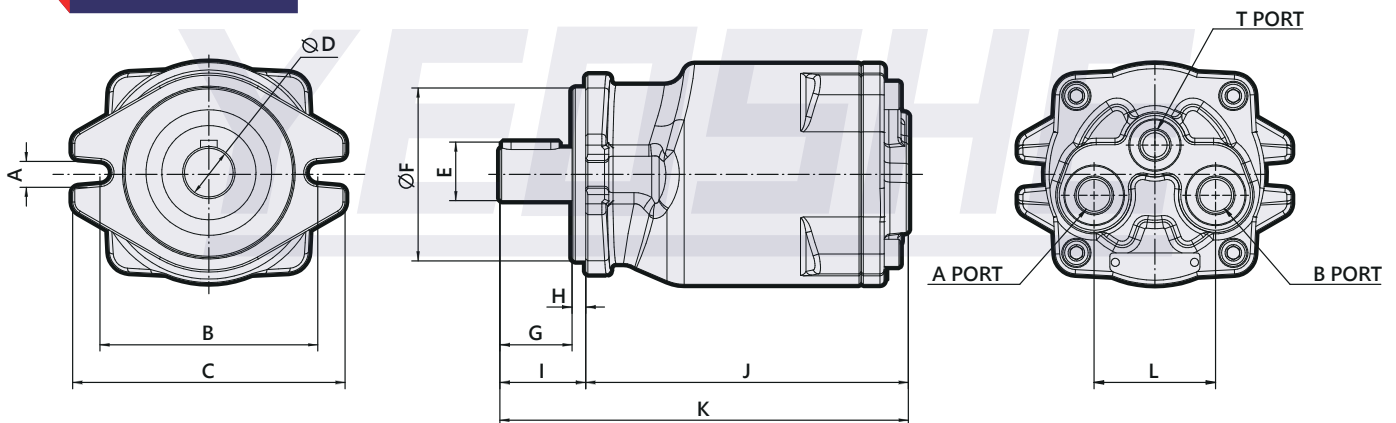

| MODEL       | A    | B     | C   | D       | E       | F               | G    | H   | I    | J     | K     | L  |
|-------------|------|-------|-----|---------|---------|-----------------|------|-----|------|-------|-------|----|
| PMF-25-05-S | 15   | 146   | 170 | Ø24.667 | Ø24.667 | Ø101.6~Ø101.549 | 38.2 | 9.1 | 47.3 | 153.5 | 200.8 | 58 |
| PMF-25-06-S | 11.2 | 106.3 | 130 | Ø24.667 | Ø24.667 | Ø82.55          | 40.8 | 6.5 | 47.3 | 153.5 | 200.8 | 58 |
| PMF-25-07-K | 11.2 | 106   | 130 | Ø25     | 28      | Ø82.5           | 43.5 | 6.5 | 50   | 153.5 | 203.5 | 58 |

## Port Size

| MODEL       | INLET/OUTLET PORT | CASE DRAIN PORT |
|-------------|-------------------|-----------------|
| PMF-25-05-S | PF 3/8            | PF 3/8          |
| PMF-25-06-S | PF 3/8            | PF 3/8          |
| PMF-25-07-K | PF 3/8            | PF 3/8          |

## Dimensions of Shaft

| MODEL       | NO. OF TEETH | PRESSURE | ANGLE | RULE     |
|-------------|--------------|----------|-------|----------|
| PMF-25-05-S | 13           | 20°      | 1.667 | JIS      |
| PMF-25-06-S | 13           | 20°      | 1.667 | JIS      |
| PMF-25-07-K | 7×7×31.5     |          |       | KEY TYPE |




# PMF-25-08/09


## Specification

| MODEL        | DISPLACEMENT<br>(cc/rev) | PRESSURE (kgf/cm) |     | TORQUE (kgf·m) |      | SPEED<br>(rpm) | WEIGHT<br>(kg) |
|--------------|--------------------------|-------------------|-----|----------------|------|----------------|----------------|
|              |                          | RATED             | MAX | RATED          | MAX  |                |                |
| PMF-25-08/09 | 25.7                     | 210               | 250 | 8.6            | 10.2 | 3000           | 8              |


## Performance Curve

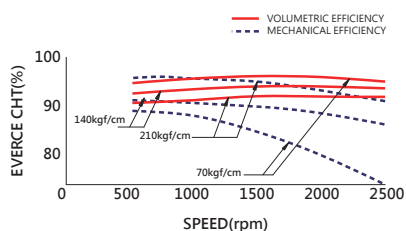


## Output Torque

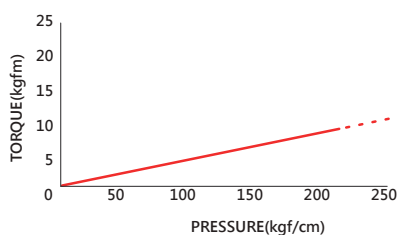

## Symbol



## Dimensions

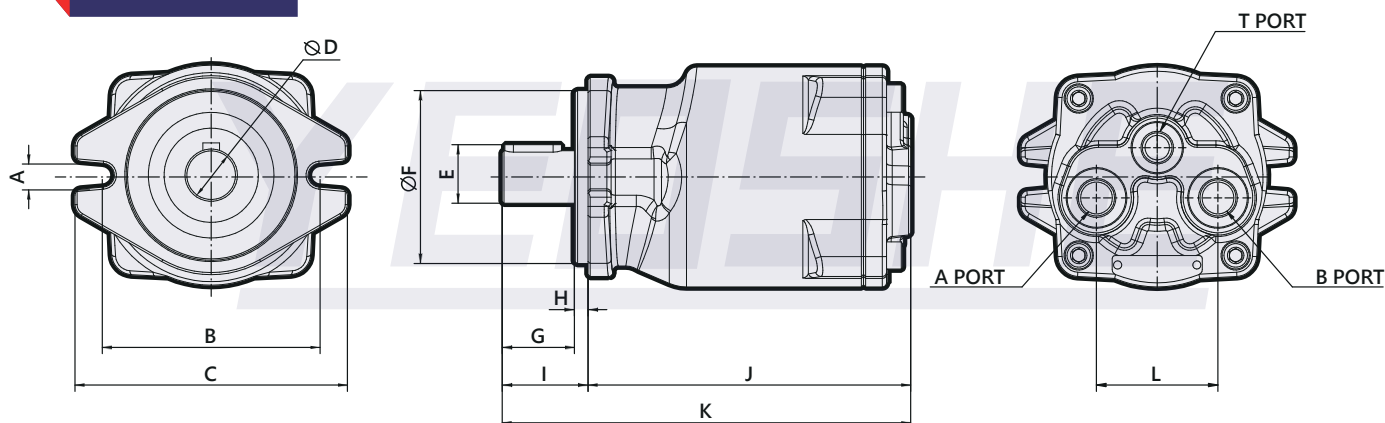

| MODEL       | A    | B   | C   | D       | E       | F      | G    | H   | I    | J     | K   | L  |
|-------------|------|-----|-----|---------|---------|--------|------|-----|------|-------|-----|----|
| PMF-25-08-S | 15   | 146 | 170 | Ø24.667 | Ø24.667 | Ø101.6 | 38.2 | 9.1 | 47.3 | 153.5 | 201 | 58 |
| PMF-25-09-S | 11.2 | 106 | 130 | Ø24.667 | Ø24.667 | Ø82.55 | 40.8 | 6.5 | 47.3 | 153.5 | 201 | 58 |

## Port Size

| MODEL       | INLET/OUTLET PORT | CASE DRAIN PORT |
|-------------|-------------------|-----------------|
| PMF-25-08-S | PF 3/8            | PF 1/4          |
| PMF-25-09-S | PF 3/8            | PF 1/4          |

## Dimensions of Shaft

| MODEL       | NO. OF TEETH | PRESSURE | ANGLE | RULE |
|-------------|--------------|----------|-------|------|
| PMF-25-08-S | 13           | 20°      | 1.667 | JIS  |
| PMF-25-09-S | 13           | 20°      | 1.667 | JIS  |




# PMF-36-01/04


## Specification

| MODEL     | DISPLACEMENT<br>(cc/rev) | PRESSURE (kgf/cm) |     | TORQUE (kgf·m) |      | SPEED<br>(rpm) | WEIGHT<br>(kg) |
|-----------|--------------------------|-------------------|-----|----------------|------|----------------|----------------|
|           |                          | RATED             | MAX | RATED          | MAX  |                |                |
| PMF-36-01 | 36                       | 210               | 250 | 12             | 14.3 | 3000           | 10.4           |
| PMF-36-04 | 36                       | 210               | 250 | 12             | 14.3 | 2800           | 10.4           |


## Performance Curve

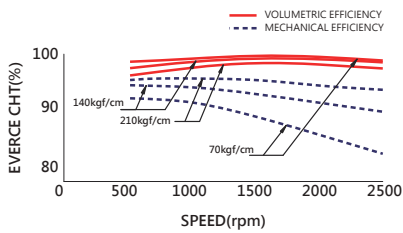


## Output Torque

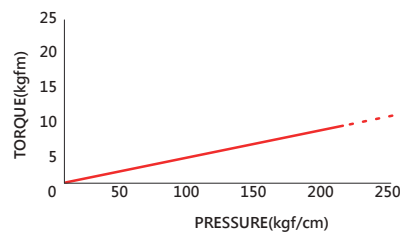

## Symbol



## Dimensions

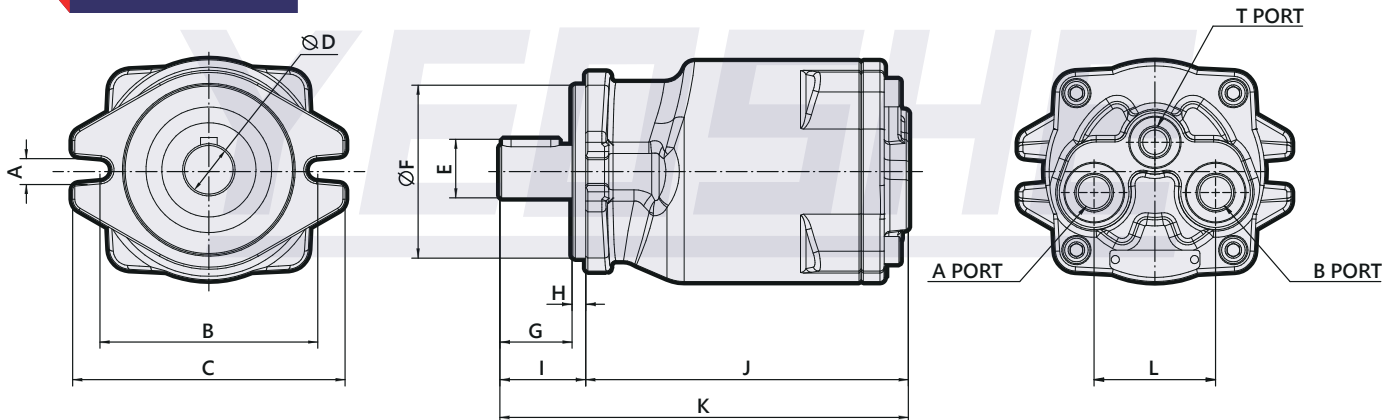

| MODEL       | A    | B   | C   | D       | E       | F               | G    | H   | I    | J   | K     | L  |
|-------------|------|-----|-----|---------|---------|-----------------|------|-----|------|-----|-------|----|
| PMF-36-01-K | 15   | 146 | 170 | Ø24     | 27      | Ø101.6~Ø101.549 | 32.1 | 9.1 | 41.2 | 172 | 213.2 | 67 |
| PMF-36-01-S | 15   | 146 | 170 | Ø24.667 | Ø24.667 | Ø101.6~Ø101.549 | 48.7 | 9.1 | 57.8 | 172 | 229.8 | 67 |
| PMF-36-04-S | 11.2 | 106 | 130 | Ø24.667 | Ø24.667 | Ø82.55          | 50   | 6.5 | 56.5 | 172 | 228.5 | 67 |

## Port Size

| MODEL       | INLET/OUTLET PORT | CASE DRAIN PORT |
|-------------|-------------------|-----------------|
| PMF-36-01-K | PF 1/2            | PF 3/8          |
| PMF-36-01-S | PF 1/2            | PF 3/8          |
| PMF-36-04-S | PF 1/2            | PF 3/8          |

## Dimensions of Shaft

| MODEL       | NO. OF TEETH | PRESSURE | ANGLE | RULE     |
|-------------|--------------|----------|-------|----------|
| PMF-36-01-K | 7×7×27       |          |       | KEY TYPE |
| PMF-36-01-S | 13           | 20°      | 1.667 | JIS      |
| PMF-36-04-S | 13           | 20°      | 1.667 | JIS      |




# PMF-39-01/02


## Specification

| MODEL        | DISPLACEMENT<br>(cc/rev) | PRESSURE (kgf/cm) |     | TORQUE (kgf·m) |      | SPEED<br>(rpm) | WEIGHT<br>(kg) |
|--------------|--------------------------|-------------------|-----|----------------|------|----------------|----------------|
|              |                          | RATED             | MAX | RATED          | MAX  |                |                |
| PMF-39-01/02 | 39                       | 210               | 250 | 13             | 15.5 | 2500           | 10.4           |


## Performance Curve

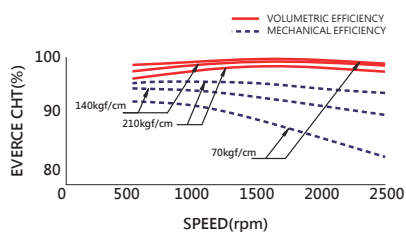


## Output Torque

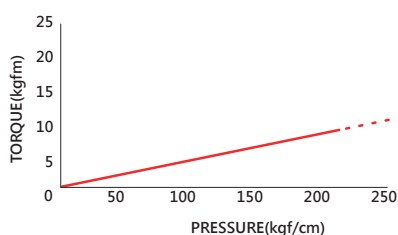

## Symbol



## Dimensions

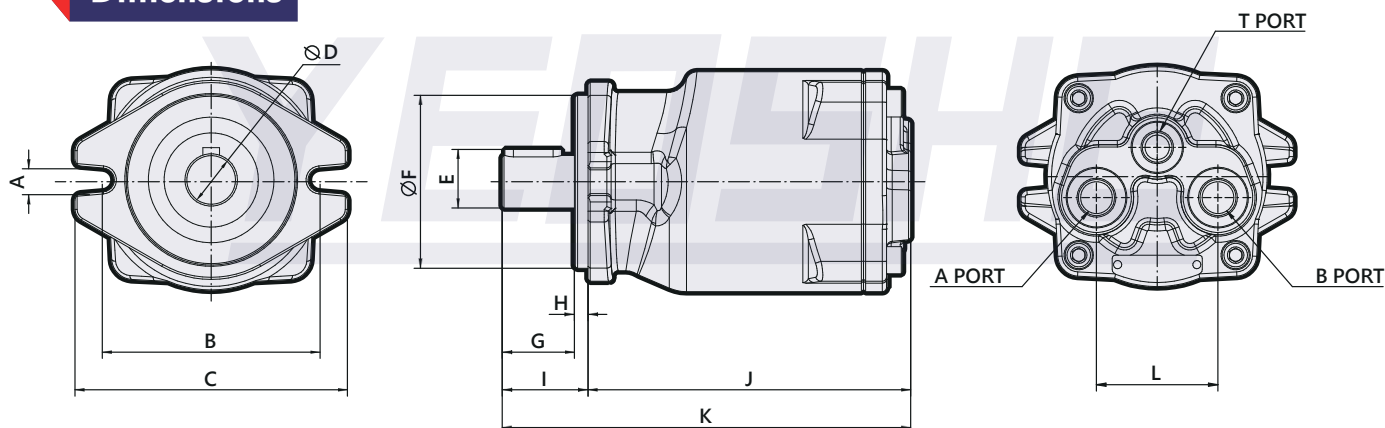

| MODEL       | A  | B   | C   | D       | E       | F               | G    | H   | I    | J   | K     | L  |
|-------------|----|-----|-----|---------|---------|-----------------|------|-----|------|-----|-------|----|
| PMF-39-01-K | 15 | 146 | 170 | Ø24     | 27      | Ø101.6~Ø101.549 | 32.1 | 9.1 | 41.2 | 172 | 213.2 | 67 |
| PMF-39-01-S | 15 | 146 | 170 | Ø24.667 | Ø24.667 | Ø82.55          | 32.1 | 9.1 | 41.2 | 172 | 213.2 | 67 |
| PMF-39-02-K | 15 | 146 | 170 | Ø25     | 28      | Ø101.6~Ø101.549 | 32.1 | 9.1 | 41.2 | 172 | 213.2 | 67 |

## Port Size

| MODEL       | INLET/OUTLET PORT | CASE DRAIN PORT |
|-------------|-------------------|-----------------|
| PMF-39-01-K | PF 1/2            | PF 3/8          |
| PMF-39-01-S | PF 1/2            | PF 3/8          |
| PMF-39-02-K | PF 1/2            | PF 3/8          |

## Dimensions of Shaft

| MODEL       | NO. OF TEETH | PRESSURE | ANGLE | RULE     |
|-------------|--------------|----------|-------|----------|
| PMF-39-01-K | 7×7×27       |          |       | KEY TYPE |
| PMF-39-01-S | 13           | 20°      | 1.667 | JIS      |
| PMF-39-02-K | 7×7×27       |          |       | KEY TYPE |




# PMF-39-03


## Specification

| MODEL     | DISPLACEMENT<br>(cc/rev) | PRESSURE (kgf/cm) |     | TORQUE (kgf·m) |      | SPEED<br>(rpm) | WEIGHT<br>(kg) |
|-----------|--------------------------|-------------------|-----|----------------|------|----------------|----------------|
|           |                          | RATED             | MAX | RATED          | MAX  |                |                |
| PMF-39-03 | 39                       | 210               | 250 | 13             | 15.5 | 2500           | 10.4           |


## Performance Curve

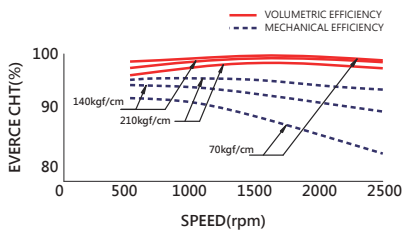


## Output Torque

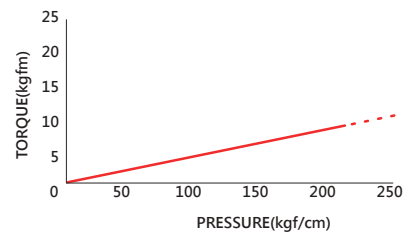

## Symbol



## Dimensions

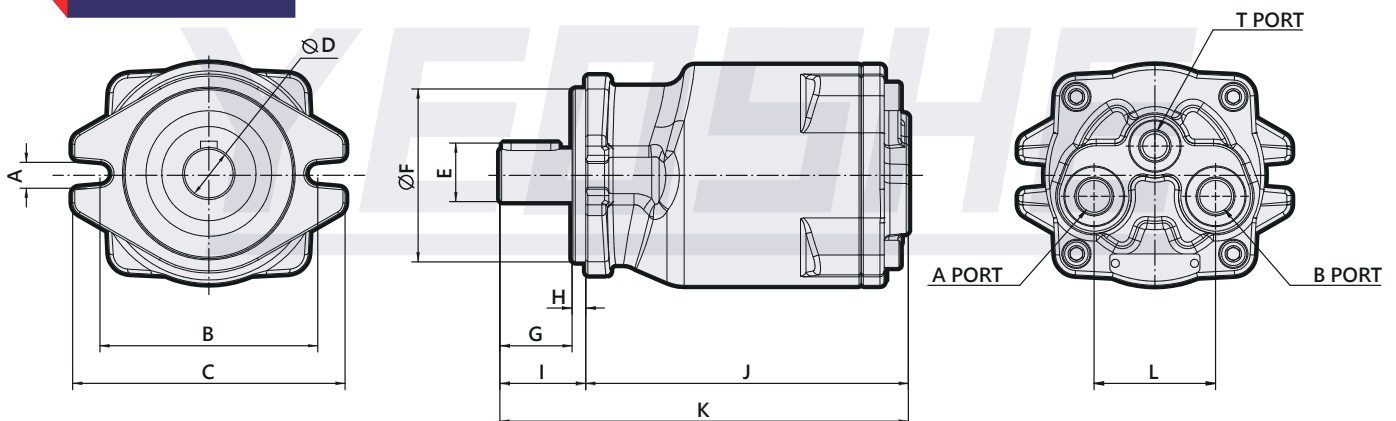

| MODEL       | A  | B   | C   | D   | E  | F               | G    | H   | I    | J   | K     | L  |
|-------------|----|-----|-----|-----|----|-----------------|------|-----|------|-----|-------|----|
| PMF-39-03-K | 15 | 146 | 170 | Ø25 | 28 | Ø101.6~Ø101.549 | 37.5 | 9.1 | 46.6 | 172 | 218.6 | 67 |

## Port Size

| MODEL       | INLET/OUTLET PORT | CASE DRAIN PORT |
|-------------|-------------------|-----------------|
| PMF-39-03-K | PF 3/8            | PF 1/4          |

## Dimensions of Shaft

| MODEL       | NO. OF TEETH | PRESSURE | ANGLE | RULE     |
|-------------|--------------|----------|-------|----------|
| PMF-39-03-K | 7×7×31.5     |          |       | KEY TYPE |




# PMF-43-01/02/03/05


## Specification

| MODEL           | DISPLACEMENT<br>(cc/rev) | PRESSURE (kgf/cm) |     | TORQUE (kgf·m) |      | SPEED<br>(rpm) | WEIGHT<br>(kg) |
|-----------------|--------------------------|-------------------|-----|----------------|------|----------------|----------------|
|                 |                          | RATED             | MAX | RATED          | MAX  |                |                |
| PMF-43-01       | 43                       | 210               | 250 | 14.3           | 17.1 | 3000           | 10.4           |
| PMF-43-02/03/05 | 43.2                     | 210               | 250 | 14.3           | 17.1 | 2800           | 10.4           |


## Performance Curve

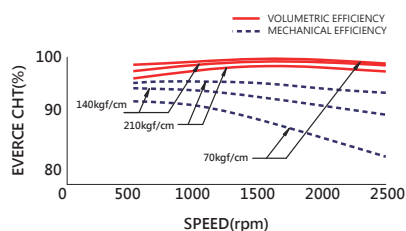


## Output Torque

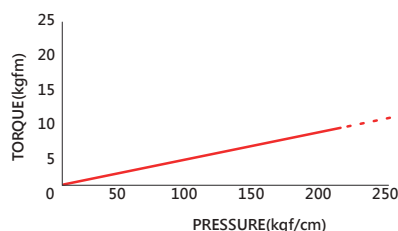

## Symbol



## Dimensions

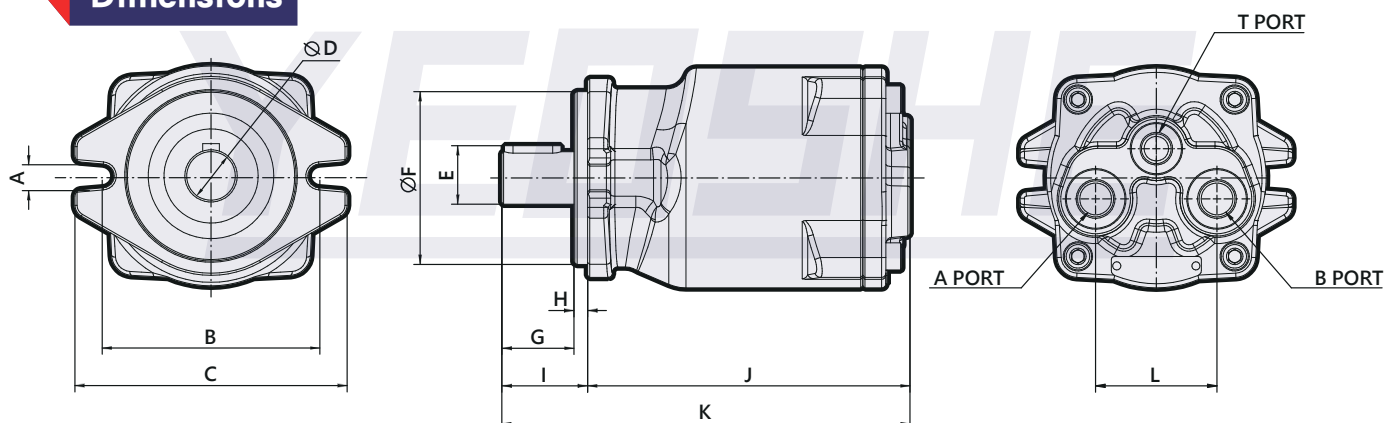

| MODEL       | A    | B   | C   | D       | E       | F               | G    | H   | I    | J   | K     | L  |
|-------------|------|-----|-----|---------|---------|-----------------|------|-----|------|-----|-------|----|
| PMF-43-01-K | 13   | 146 | 170 | Ø24     | 27      | Ø101.6~Ø101.549 | 32.1 | 9.1 | 41.2 | 172 | 213.2 | 67 |
| PMF-43-02-K | 11.2 | 106 | 130 | Ø22     | 25      | Ø82.55          | 39.5 | 6.5 | 46   | 172 | 218   | 67 |
| PMF-43-03-S | 11.2 | 106 | 130 | Ø24.667 | Ø24.667 | Ø82.55          | 50   | 6.5 | 56.5 | 172 | 228.5 | 67 |
| PMF-43-05-K | 11.2 | 106 | 130 | Ø25     | 28      | Ø82.55          | 43.5 | 6.5 | 50   | 172 | 222   | 67 |

## Port Size

| MODEL       | INLET/OUTLET PORT | CASE DRAIN PORT |
|-------------|-------------------|-----------------|
| PMF-43-01-K | PF 1/2            | PF 3/8          |
| PMF-43-02-K | PF 1/2            | PF 3/8          |
| PMF-43-03-S | PF 1/2            | PF 3/8          |
| PMF-43-05-K | PF 1/2            | PF 3/8          |

## Dimensions of Shaft

| MODEL       | NO. OF TEETH | PRESSURE | ANGLE | RULE     |
|-------------|--------------|----------|-------|----------|
| PMF-43-01-K | 7×7×27       |          |       | KEY TYPE |
| PMF-43-02-K | 7×7×32       |          |       | KEY TYPE |
| PMF-43-03-S | 13           | 20°      | 1.667 | JIS      |
| PMF-43-05-K | 7×7×31.5     |          |       | KEY TYPE |




# PMF-47-01/11


## Specification

| MODEL        | DISPLACEMENT<br>(cc/rev) | PRESSURE (kgf/cm) |     | TORQUE (kgf·m) |      | SPEED<br>(rpm) | WEIGHT<br>(kg) |
|--------------|--------------------------|-------------------|-----|----------------|------|----------------|----------------|
|              |                          | RATED             | MAX | RATED          | MAX  |                |                |
| PMF-47-01/11 | 47                       | 210               | 250 | 15.7           | 18.7 | 3000           | 10.4           |


## Performance Curve

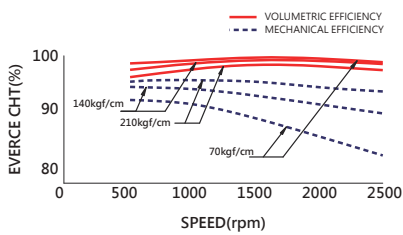


## Output Torque

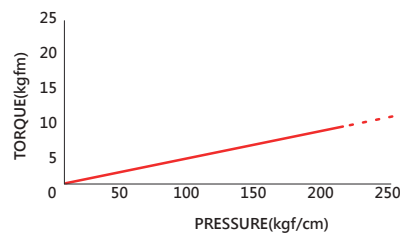

## Symbol



## Dimensions

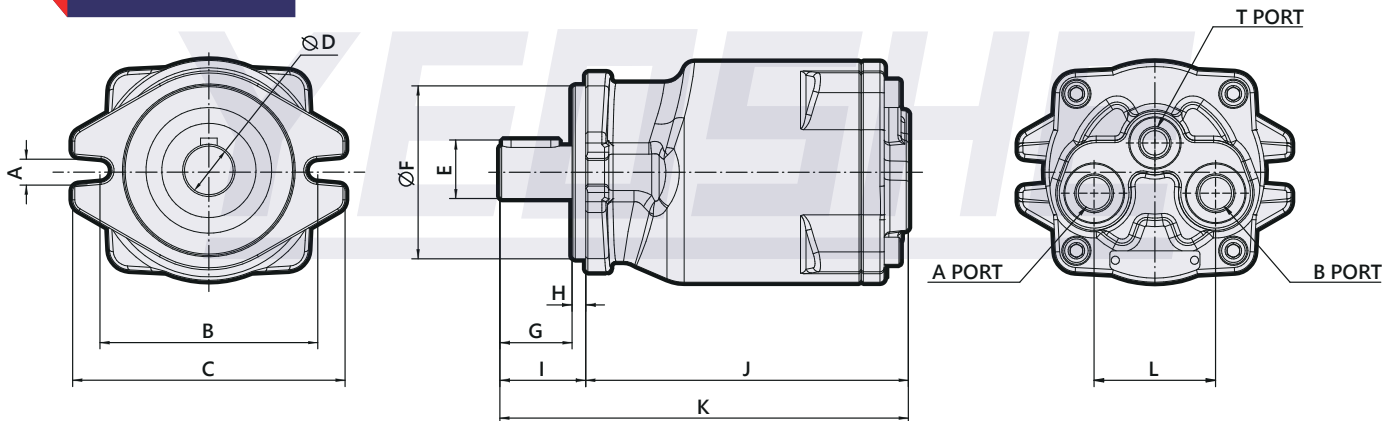

| MODEL       | A    | B   | C   | D       | E       | F               | G    | H   | I    | J   | K     | L  |
|-------------|------|-----|-----|---------|---------|-----------------|------|-----|------|-----|-------|----|
| PMF-47-01-K | 15   | 146 | 170 | Ø24     | 27      | Ø101.6~Ø101.549 | 32.1 | 9.1 | 41.2 | 172 | 213.2 | 67 |
| PMF-47-01-S | 15   | 146 | 170 | Ø24.667 | Ø24.667 | Ø101.6~Ø101.549 | 51.5 | 9.1 | 60.6 | 172 | 232.6 | 67 |
| PMF-47-11-K | 11.2 | 106 | 130 | Ø25     | 28      | Ø82.55          | 48.5 | 6.5 | 55   | 172 | 227   | 67 |

## Port Size

| MODEL       | INLET/OUTLET PORT | CASE DRAIN PORT |
|-------------|-------------------|-----------------|
| PMF-47-01-K | PF 1/2            | PF 3/8          |
| PMF-47-01-S | PF 1/2            | PF 3/8          |
| PMF-47-11-K | PF 1/2            | PF 3/8          |

## Dimensions of Shaft

| MODEL       | NO. OF TEETH | PRESSURE | ANGLE | RULE     |
|-------------|--------------|----------|-------|----------|
| PMF-47-01-K | 7×7×27       |          |       | KEY TYPE |
| PMF-47-01-S | 13           | 20°      | 1.667 | JIS      |
| PMF-47-11-K | 8×7×38       |          |       | KEY TYPE |

**YEOSHE BEST CHOICE**  
**Innovative Technology**

**Efficient Performance**  
**Reliable Quality and Service**



**油聖液壓科技有限公司**

**YEOSHE HYDRAULICS TECHNOLOGY CO.,LTD.**

413 台灣台中市霧峰區霧工一路68號

No.68, Wugong 1st Rd., Wufong Dist., Taichung City, Taiwan, 413

**TEL** +886-4-2333339 **FAX** +886-4-23333817 **E-mail** yeoshe@yeoshe.com.tw

東莞辦事處 Dongguan

**CP** +86-13600266957 (Miss Zhong)

**E-mail** yeoshe@yeoshe.com.tw

上海辦事處 Shanghai

**CP** +86-15021931394 (Mr. Wu)

**CP** +86-18939716986 (Mr. Chen)

經銷商 Distributor



[www.yeoshehydraulic.com](http://www.yeoshehydraulic.com)

版權所有 翻印必究  
Copyright ©2025 by YEOSHE

